


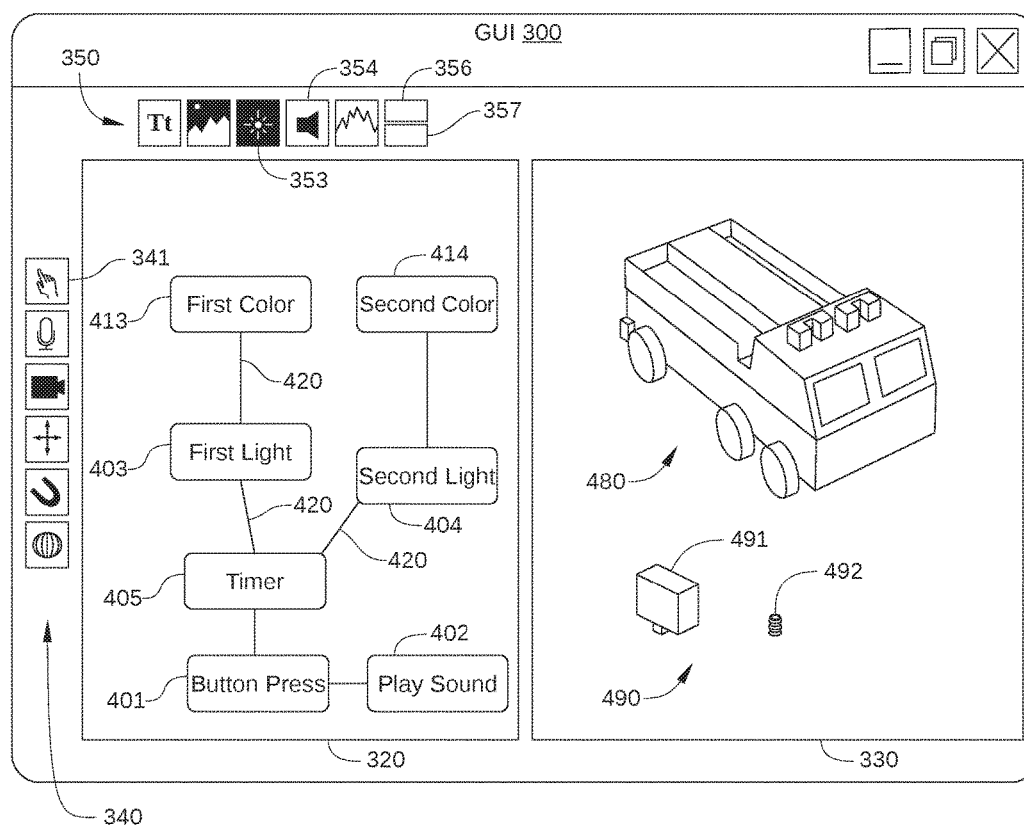

US 20180196889A1

(19) **United States**(12) **Patent Application Publication**
GROSSMAN et al.(10) **Pub. No.: US 2018/0196889 A1**(43) **Pub. Date: Jul. 12, 2018**(54) **TECHNIQUES FOR DESIGNING
INTERACTIVE OBJECTS WITH
INTEGRATED SMART DEVICES****Publication Classification**(51) **Int. Cl.**
G06F 17/50 (2006.01)(52) **U.S. Cl.**
CPC **G06F 17/50** (2013.01); **G06T 19/00**
(2013.01); **G06F 2217/04** (2013.01); **G06F**
2217/14 (2013.01)(71) Applicant: **AUTODESK, INC.**, San Rafael, CA
(US)(72) Inventors: **Tovi GROSSMAN**, Toronto (CA);
Fraser ANDERSON, Camrose (CA);
Ryan Michael SCHMIDT, Toronto
(CA); **Saul GREENBERG**, Canmore
(CA); **David LEDO**, Calgary (CA)(21) Appl. No.: **15/863,767**(22) Filed: **Jan. 5, 2018****Related U.S. Application Data**(60) Provisional application No. 62/443,624, filed on Jan.
6, 2017.(57) **ABSTRACT**

One embodiment of the present invention sets forth a technique for designing and generating a smart object. The technique includes receiving a first input indicating a smart object behavior of a smart object that includes a smart device embedded in a three-dimensional (3D) object; in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and transmitting the computer instructions to the smart device.



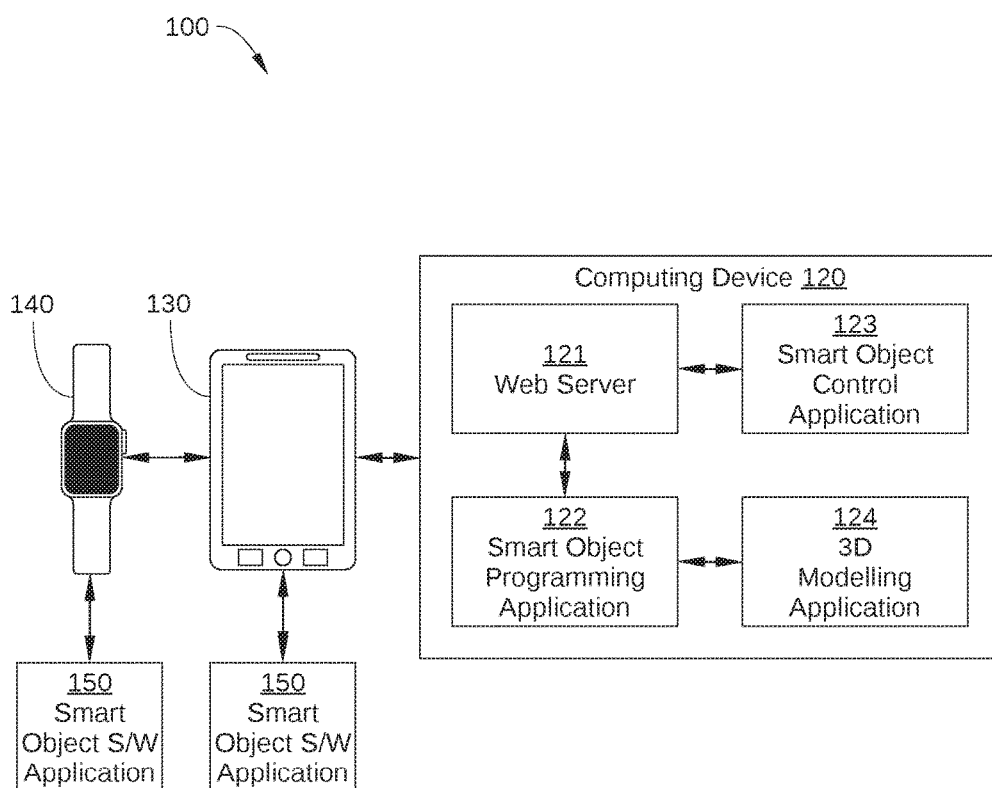


FIG. 1

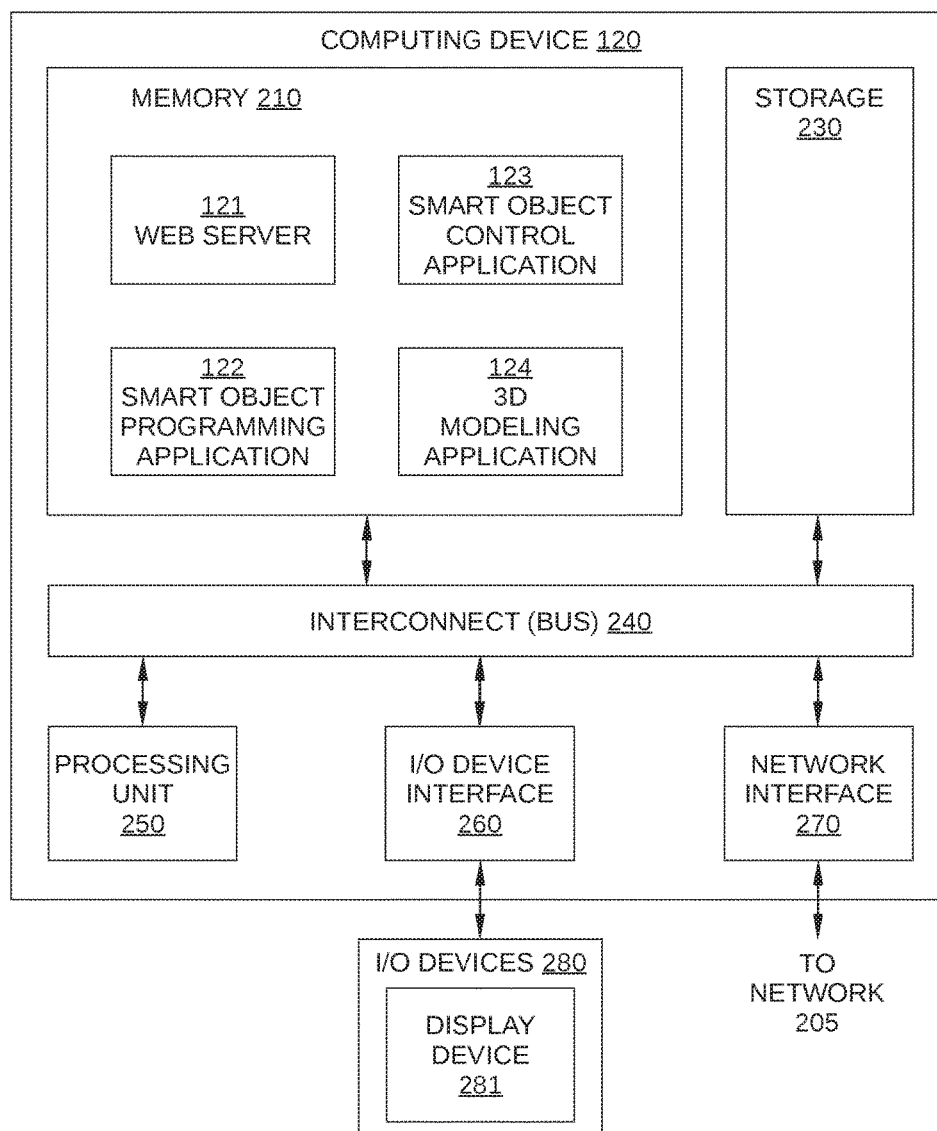


FIG. 2

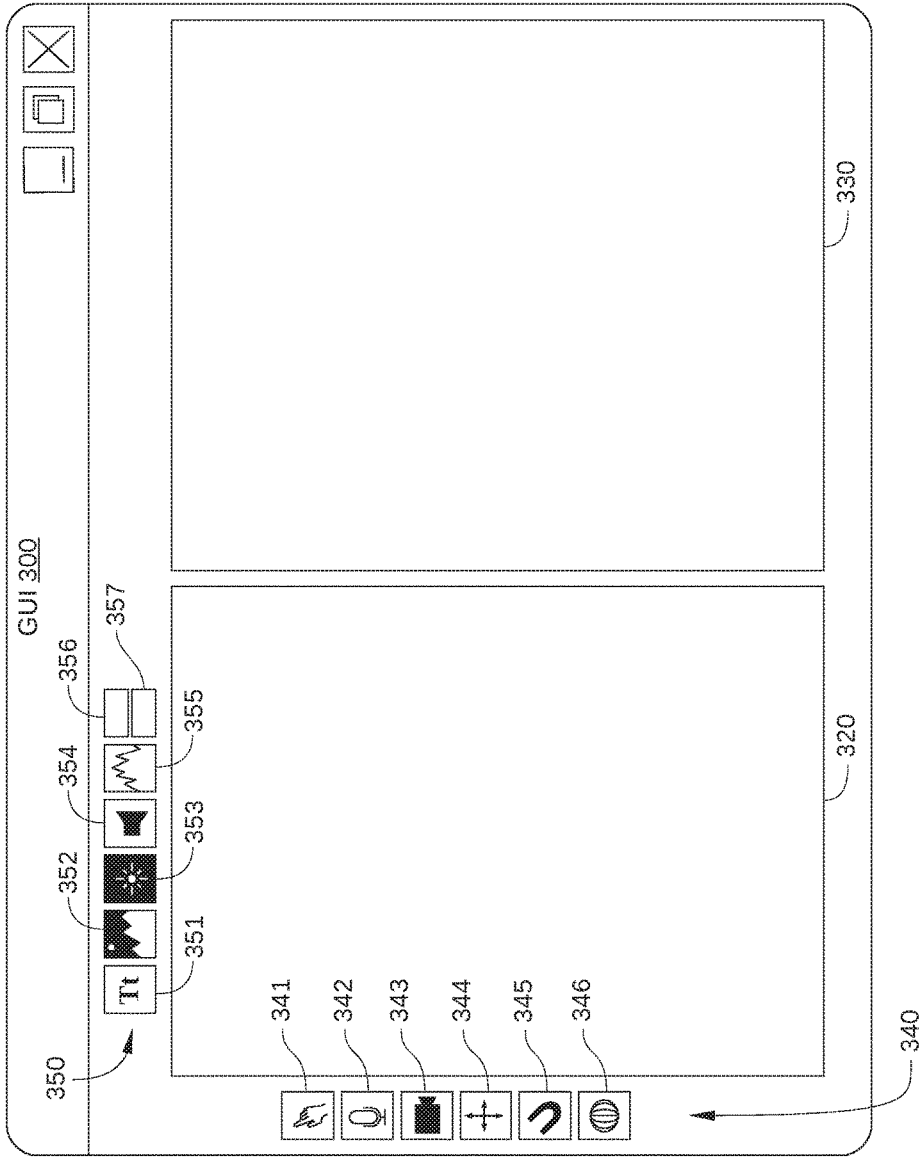


FIG. 3

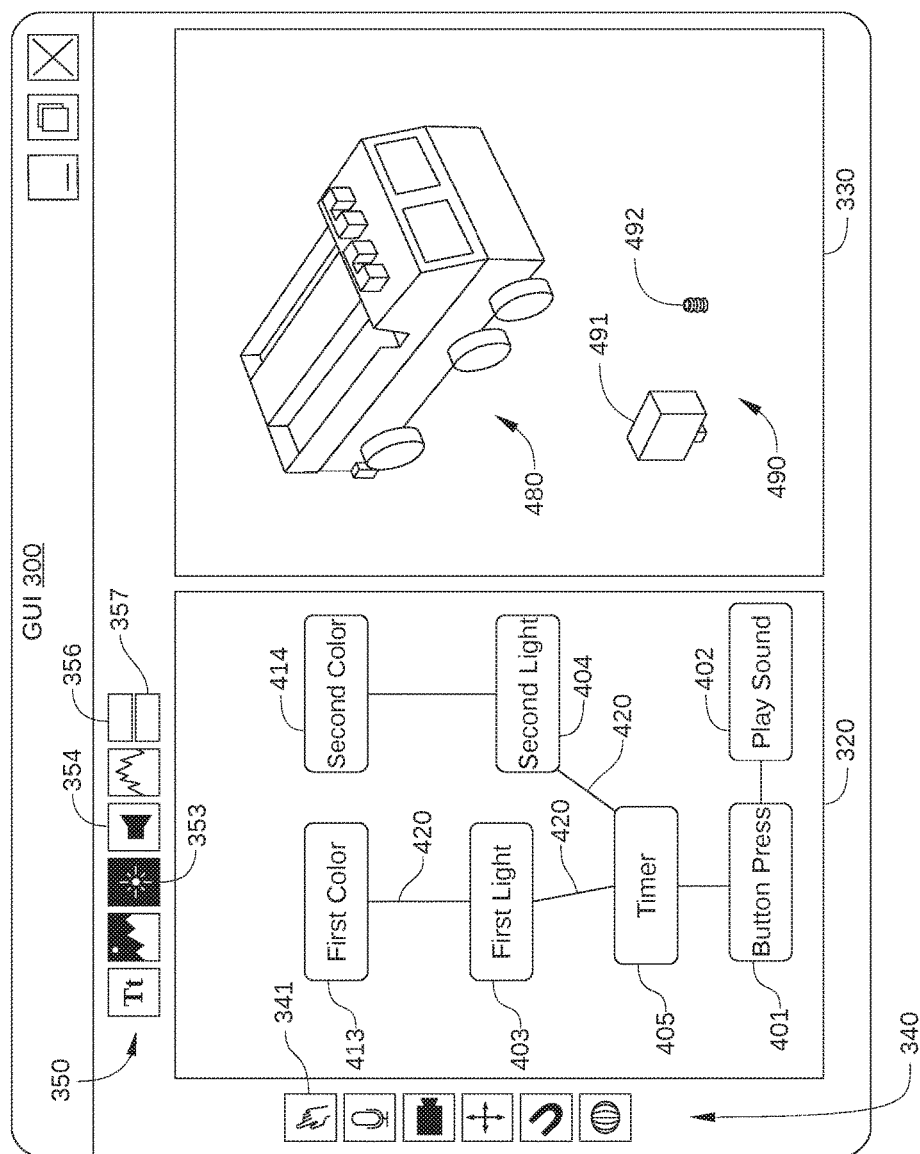


FIG. 4

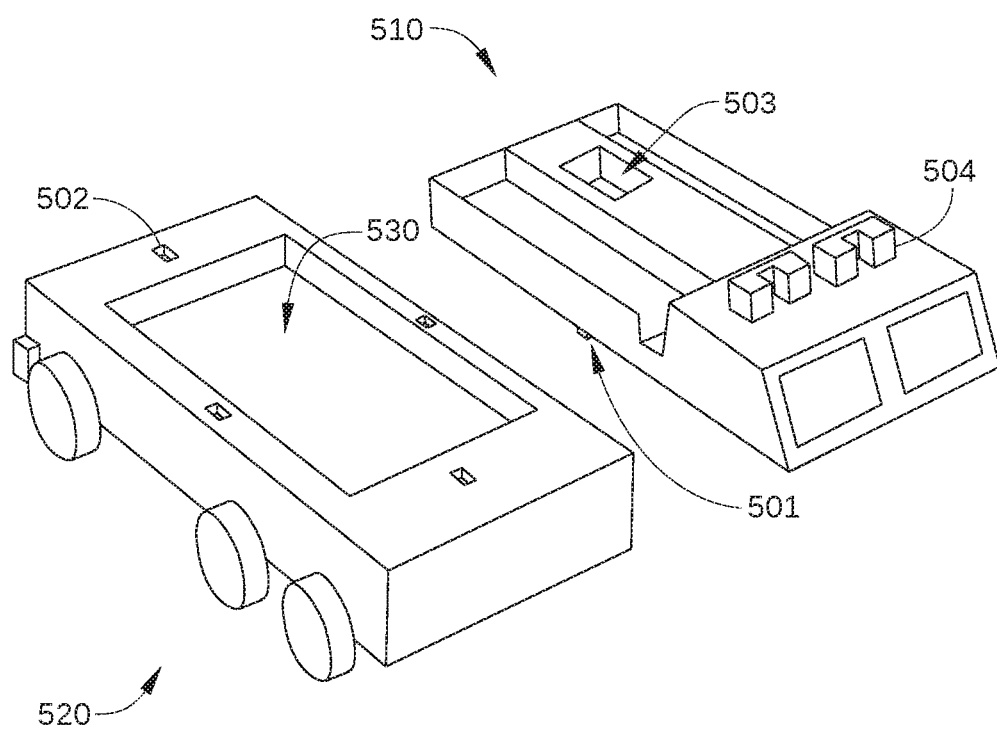


FIG. 5

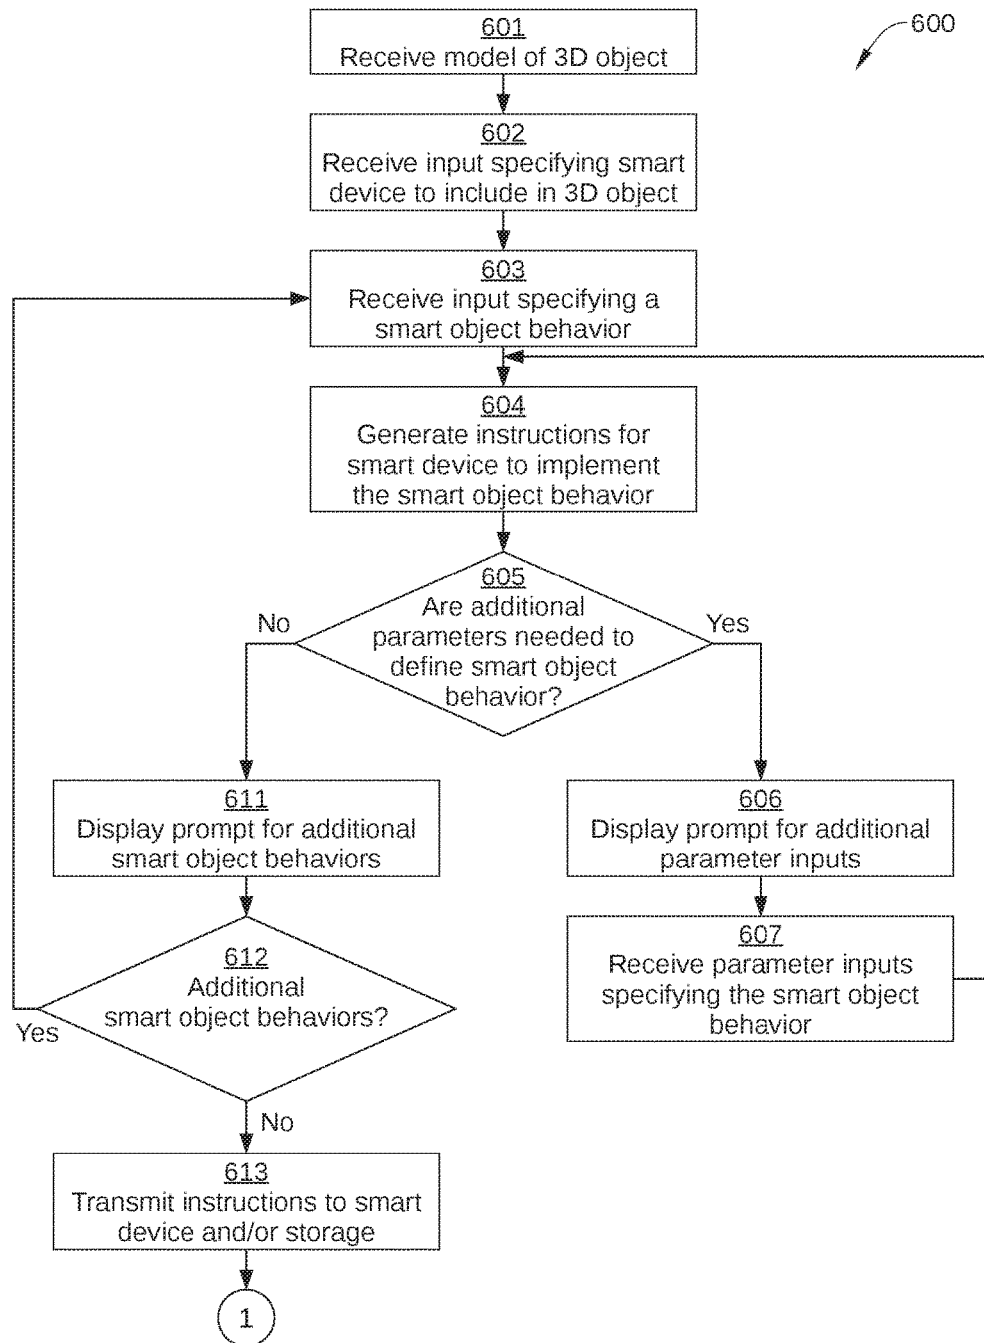


FIG. 6A

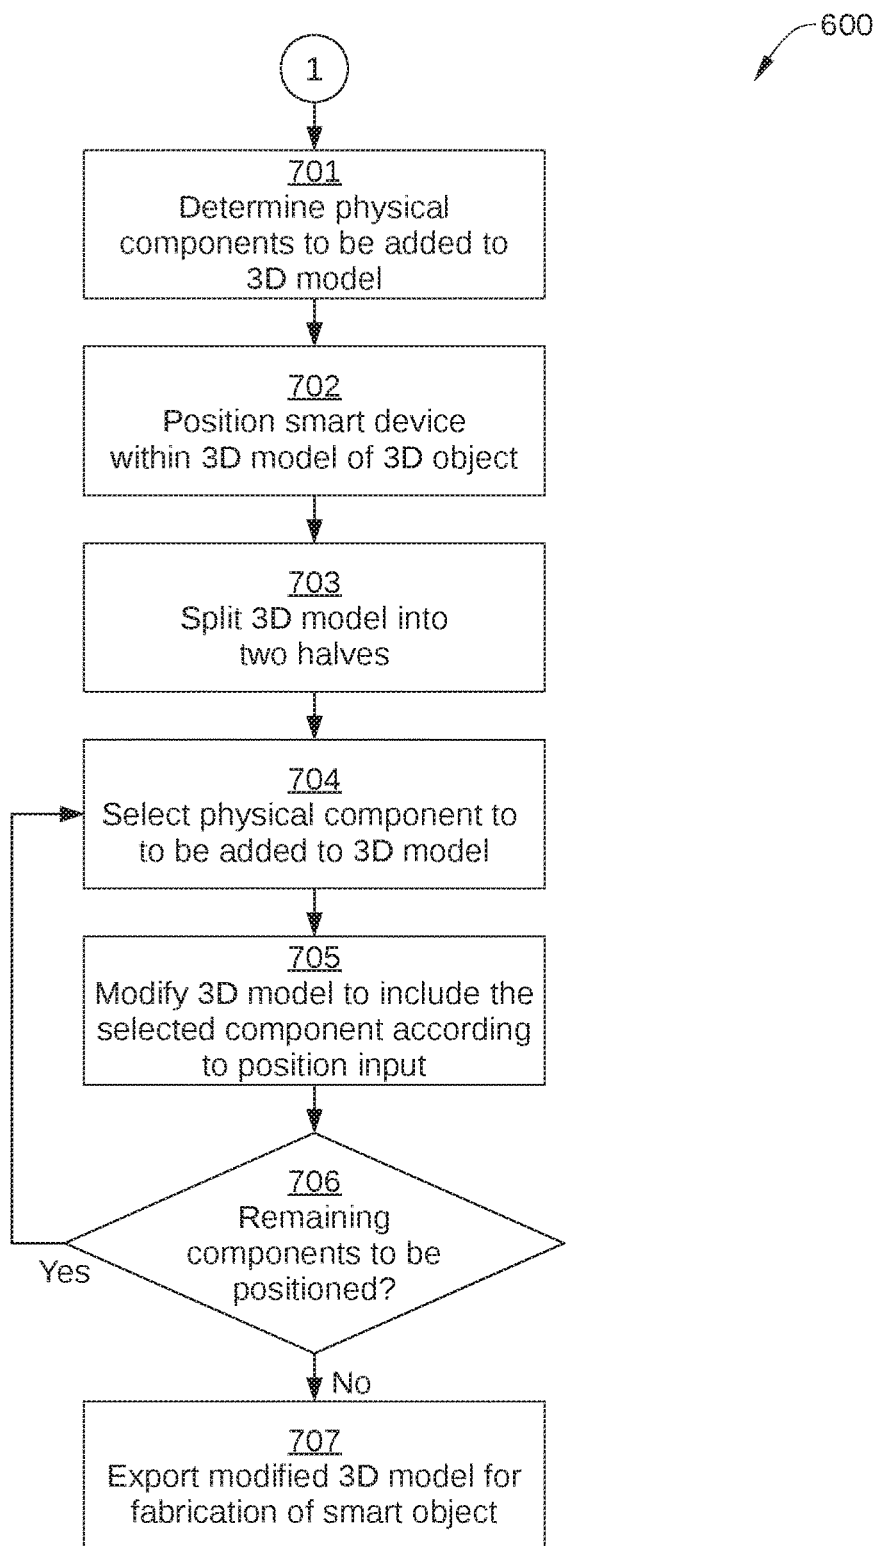


FIG. 6B

TECHNIQUES FOR DESIGNING INTERACTIVE OBJECTS WITH INTEGRATED SMART DEVICES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority benefit of the United States Provisional Patent Application titled, “BRINGING PASSIVE OBJECTS TO LIFE WITH EMBEDDED MOBILE DEVICES,” filed on Jan. 6, 2017 and having Ser. No. 62/443,624. The subject matter of this related application is hereby incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates generally to computer-aided design and, more specifically, to techniques for designing interactive objects with integrated smart devices.

Description of the Related Art

[0003] Smart objects are devices that include digital capabilities with some form of sensing, connectivity, and/or interactive capabilities. Many smart objects are now available to consumers, including consumer electronics, appliances, and toys, and smart objects are quickly becoming central to developing systems, such as the Internet of things and ubiquitous computing systems. Smart objects have a wide range of form factors and applications and continue to become “smarter” with increased connectivity, richer machine-based and human-based interactions, and more complex sensors to better understand their respective environments.

[0004] However, prototyping and testing different smart objects is not a trivial process. More specifically, designing and testing the performance of each smart object requires an in-depth understanding of both software and hardware components, including identifying, acquiring, assembling, and programming the appropriate electronics for the specific functionality and application associated with the smart object. In addition, creating a three-dimensional form-factor for the smart object that both reflects the desired user experience and houses the required circuitry and electronics requires extensive experience with computer-aided design software. Accordingly, only individual designers with wide-ranging experience or a team of designers that collectively has the required experience can successfully prototype smart objects.

[0005] As the foregoing illustrates, what is needed in the art are more effective techniques for designing and prototyping smart objects.

SUMMARY

[0006] One embodiment of the present invention sets forth a technique for generating a smart object. The technique includes receiving a first input indicating a smart object behavior of a smart object that includes a smart device embedded in a three-dimensional (3D) object; in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the

smart object behavior; and transmitting the computer instructions to the smart device.

[0007] At least one advantage of the disclosed techniques is that a user can generate a smart object and specify high-level interactive behaviors of the smart object without designing specialized circuits or control systems, or writing and debugging control logic. An additional advantage is that a smart device can be easily incorporated into a prototype smart object. The behavior of the smart device can then be easily tested or modified by changing behavior parameters via the visual programming interface, rather than by reprogramming software or redesigning circuitry for the smart object. These advantages provide a technological improvement over prior art techniques, in which prototyping and testing an interactive smart device is an involved and multifaceted process.

BRIEF DESCRIPTIONS OF THE DRAWINGS

[0008] FIG. 1 is a block diagram of smart object design system configured to implement one or more aspects of the present invention.

[0009] FIG. 2 is a more detailed illustration of the computing device of FIG. 1, according to various embodiments of the invention.

[0010] FIG. 3 is a schematic illustration of a graphical user interface (GUI) that displays a visual programming interface, according to various embodiments of the invention.

[0011] FIG. 4 is an illustration of the GUI of FIG. 3 displaying a smart object behavior selection process, according to various embodiments of the invention.

[0012] FIG. 5 is a schematic illustration of a three-dimensional (3D) model split into two pieces as part of an automated design process, according to various embodiments of the invention.

[0013] FIGS. 6A-6B set forth a flowchart of method steps for designing and generating a smart object, according to various embodiments of the present invention.

DETAILED DESCRIPTION

[0014] In the following description, numerous specific details are set forth to provide a more thorough understanding of the embodiments of the present invention. However, it will be apparent to one of skill in the art that the embodiments of the present invention may be practiced without one or more of these specific details.

System Overview

[0015] FIG. 1 is a block diagram of a smart object design system 100 configured to implement one or more aspects of the present invention. Smart object design system 100 includes a computing device 120, a smart device 130, and, in some embodiments, a wearable smart device 140.

[0016] Smart object design system 100 enables a designer to implement high-level behaviors in a smart object via a drag-and-drop or other visual programming interface. Code is then generated based on the smart object behaviors and associated input information selected by the designer. A first portion of the code is streamed to a smart device (e.g., smart device 130 or wearable smart device 140) that is to be embedded in the smart object being designed, and a second portion of the code resides in a computing device that controls the smart object. The first portion of the code enables the smart device to process inputs to and to generate

outputs from the smart device, while the second portion of the code enables computing device **120** to control the smart behaviors of the smart object. Smart object design system **100** then guides the designer through simplified modeling tasks within a 3D modeling workspace to modify an existing 3D model so that the selected smart object behaviors can be performed by a smart object that is based on the 3D model. Such a smart object can then be produced by embedding a smart device programmed with the first portion of the code into a 3D object that is formed using the modified 3D model and standard 3D printing technology. Thus, smart object design system **100** enables hobbyists, makers, and interaction designers to rapidly prototype and test different interactive smart device behaviors without the need for advanced 3D modelling, programming, or electronic assembly skills.

[0017] Smart device **130** is a smart device capable of wireless communication, receiving physical inputs, and generating one or more physical outputs. In some embodiments, smart device **130** is capable of receiving a touch-based input, an image-based input, a magnet-based input, a motion-based input, an orientation-based input, and/or a sound-based input. In some embodiments, smart device **130** is also capable of generating a light-based output, a sound-based output, and/or a vibration or other haptic output. For example, smart device **130** can be a smart phone or an electronic tablet.

[0018] In operation as part of smart object design system **100**, smart device **130** executes a smart object software application **150** that streams sensor data from smart device **130** to a smart object control application **123** (executed by computing device **120**) via a web server **121**. In addition, smart object software application **150** receives and implements control inputs from a smart object control application **123** (executed by computing device **120**) via web server **121**. For example, when smart device **130** receives a particular touch input, such as a capacitive input received by a display screen of smart device **130**, smart object software application **150** then transmits sensor data generated in response to the particular touch input to smart object control application **123**. The sensor data transmitted to smart object control application **123** may include (1) input data indicating that a capacitive input has been received and (2) location data referencing the specific portion of the display screen of smart device **130** where the particular touch input was received. Based on the sensor data transmitted by smart object software application **150**, software smart object control application **123** can determine a suitable output in response to the particular touch input, and transmit control signals to smart object software application **150**. Smart object software application **150** receives the control signals and causes smart device **130** to generate the suitable output. As noted, the suitable output generated by smart device **130** may include one or more of a light-based output, a sound-based output, and/or a vibration or other haptic output.

[0019] Consequently, when smart device **130** is embedded in a suitably designed smart object and programmed with smart object software application **150**, the smart object is enabled to receive specific inputs or recognize specific events that are programmed into smart object software application **150**. The smart object is further enabled to perform specific functions or generate specific outputs according to the programming included in smart object software application **150** and the inputs received from smart object control application. Advantageously, such a smart

object has such functionality without a specialized control system, sensor system, power supply, or wireless interface capability. Instead, the selected smart object behaviors of such a smart object are enabled by embedding smart device **130** within the smart object. In addition, certain physical features can be included in the design of the smart object that enable the outputs generated by smart device **130** to be realized as the selected smart object behaviors. Further, constantly streaming data from smart device **130** to smart object control application **123** allows for live debugging and interactive reprogramming of the smart object in which smart device **130** is embedded.

[0020] Wearable smart device **140** is a wearable smart device having some or all of the capabilities described above for smart device **130**. For example, wearable smart device **140** can be a smart watch. In some embodiments, wearable smart device **140** communicates with smart object control application **123** via web server **121**, and in other embodiments, wearable smart device **140** communicates with smart object control application **123** via a combination of smart device **130** and web server **121**. In operation as part of smart object design system **100**, wearable smart device **140** executes smart object software application **150** in a similar fashion as smart device **130**, as set forth above.

[0021] Computing device **120** includes web server **121** and executes smart object programming application **122** and smart object control application **123**. In some embodiments, computing device **120** also executes a 3D modelling application **124**. Computing device **120** can be any computing device suitable for practicing one or more embodiments of the present invention. One embodiment of computing device **120** is illustrated in FIG. 2.

[0022] FIG. 2 is a more detailed illustration of computing device **120**, according to various embodiments of the invention. Computing device **120** may be a desktop computer, a laptop computer, a tablet computer, or any other type of computing device configured to receive input, process data, generate control signals, and display images. Computing device **120** is configured to run smart object programming application **122**, smart object control application **123**, and/or 3D modelling application **124**, which reside in a memory **210**. It is noted that the computing device described herein is illustrative and that any other technically feasible configurations fall within the scope of the present invention.

[0023] As shown, computing device **120** includes, without limitation, an interconnect (bus) **240** that connects a processing unit **250**, an input/output (I/O) device interface **260** coupled to input/output (I/O) devices **280**, memory **210**, a storage **230**, and a network interface **270**. Processing unit **250** may be any suitable processor implemented as a central processing unit (CPU), a graphics processing unit (GPU), an application-specific integrated circuit (ASIC), a field programmable gate array (FPGA), any other type of processing unit, or a combination of different processing units, such as a CPU configured to operate in conjunction with a GPU. In general, processing unit **250** may be any technically feasible hardware unit capable of processing data and/or executing software applications, including smart object programming application **122**, smart object control application **123**, and/or 3D modelling application **124**. Further, in the context of this disclosure, the computing elements shown in computing device **120** may correspond to a physical computing system (e.g., a system in a data center) or may be a virtual computing instance executing within a computing cloud.

[0024] I/O devices **280** may include devices capable of providing input, such as a keyboard, a mouse, a touch-sensitive screen, and so forth, as well as devices capable of providing output, such as a display device **281**. Additionally, I/O devices **280** may include devices capable of both receiving input and providing output, such as a touchscreen, a universal serial bus (USB) port, and so forth. I/O devices **280** may be configured to receive various types of input from an end-user of computing device **120**, and to also provide various types of output to the end-user of computing device **120**, such as displayed digital images or digital videos. In some embodiments, one or more of I/O devices **280** are configured to couple computing device **120** to a network **205**.

[0025] Network **205** may be any technically feasible type of communications network that allows data to be exchanged between computing device **120** and external entities or devices, such as smart device **130**, wearable smart device **140**, a web server, or another networked computing device. For example, network **205** may include a wide area network (WAN), a local area network (LAN), a wireless (WiFi) network, a Bluetooth network and/or the Internet, among others.

[0026] Memory **210** may include a random access memory (RAM) module, a flash memory unit, or any other type of memory unit or combination thereof. Processing unit **250**, I/O device interface **260**, and network interface **270** are configured to read data from and write data to memory **210**. Memory **210** includes various software programs that can be executed by processor **250** and application data associated with said software programs, including smart object programming application **122**, smart object control application **123**, and/or 3D modelling application **124**.

[0027] Returning now to FIG. 1, web server **121** includes a wireless transceiver, and enables wireless communications between computing device **120** and smart device **130**. For example, in some embodiments, web server **121** includes a Node JS server running on computing device **120**. In some embodiments, web server **121** also enables wireless communications directly between computing device **120** and wearable smart device **140**.

[0028] Smart object programming application **122** is a software application executed on computing device **120** and configured to enable a user to specify high-level interactive behaviors via a visual programming interface. In addition, smart object programming application **122** is configured to modify a 3D model via a guided modelling process to generate a 3D model for forming a smart object. The 3D model is configured so that a smart device can be embedded therein and used as the input detection and output generation portion of a smart device. A smart object having a form factor based on a 3D model modified by smart object programming application **122** can physically accommodate smart device **130** or wearable smart device **140** in a way that enables the smart device to receive certain physical inputs when the smart object is exposed to the physical inputs. In addition, the smart object can physically accommodate the smart device in a way that enables the smart object to generate certain physical outputs. For example, the smart object can simulate an LED output by routing a light output from the screen of the smart device to a certain location in the smart object. As a result, the smart device embedded within the smart object can serve as an interpreter of physical inputs and a generator of appropriate physical

outputs. In this way, a suitably programmed smart device can be incorporated into an interactive smart object as the computing resource of the smart object.

[0029] In the embodiments illustrated in FIGS. 1 and 2, computing device **120** performs certain visual programming, coding, model generation, and other functions. In alternative embodiments, some or all of the functionality described herein for computing device **120** is included in smart device **130** or wearable smart device **140**. For example, in an embodiment in which smart object design system **100** does not include computing device **120**, smart device **130** or wearable smart device **140** may execute smart object programming application **122**, smart object control application **123**, and/or 3D modelling application **124**.

Visual Programming Interface

[0030] In some embodiments, the visual programming interface generated by smart object programming application **122** is displayed via a graphical user interface (GUI) displayed on display device **281**. One such embodiment is illustrated in FIG. 3. FIG. 3 is a schematic illustration of a GUI **300** that displays a visual programming interface, according to various embodiments of the invention. GUI **300** includes a visual programming panel **320** that enables a designer to prototype and test specific smart object behaviors, such as generating a physical output when the smart object is exposed to a specific physical input. Visual programming panel **320** allows a designer with no programming skills to intuitively input parameters for inputs to and outputs from the smart object. GUI **300** also includes a 3D modelling panel **330** that enables a designer to dynamically modify an imported 3D model of a base object into a 3D model of a smart object in which a smart device can be embedded and generate specified physical outputs. GUI **300** further includes a plurality of input event buttons **340** and a plurality of output action buttons **350**.

[0031] 3D modelling panel **330** is an interactive 3D-modelling canvas included in the visual programming interface that updates as a designer modifies the high-level behaviors implemented in the smart object. When additional actions are required to fully define a particular smart object behavior, the visual programming interface prompts the designer for the requisite additional information. In some embodiments, the functionality of 3D modelling panel **330** is provided by 3D modelling application **124** (shown in FIG. 1). Alternatively, the functionality of 3D modelling panel **330** can be incorporated in smart object programming application **122**.

[0032] Input event buttons **340** include buttons for selecting an event, user input, or other physical input to which a specific physical output is to be generated by the smart object being designed. In the embodiment illustrated in FIG. 3, input event buttons **340** include a touch input button **341**, a sound-based input button **342**, a visual (camera-based) input button **343**, a motion-based input button **344**, a magnetic input button **345**, and a global positioning system (GPS) event button **346**. Touch input button **341** initiates the process of defining a touch-based input received by the smart device, such as a touch input to a specific location of the screen of the smart device that is embedded in the smart object. For example, selection of touch input button **341** can initiate the display of drop-down menus or user prompt windows that further enable the designer to define the touch input, such as the duration of the touch, the location of the

touch on the smart device screen (when exposed), and whether the touch is a single tap, double tap, or swipe. In embodiments in which the screen of the smart device is not exposed when embedded in the smart object, a capacitive button and/or trace may be included in the smart object to transfer a user touch at the exterior of the smart object to the screen of the smart device.

[0033] Similarly, selection of sound-based input button **342** initiates the process of defining an input received by a microphone of the smart device, such as a voice input or other sound-based input. Selection of visual input button **343** initiates the process of defining an input received by a camera of the smart device, such as an average light level sensed, a color sensed, or a particular class of object detected by the smart device via computer vision. Selection of motion-based input button **344** initiates the process of defining an input received by an accelerometer of the smart device, such as a specific motion, gesture, orientation, or magnitude of motion (shaking). Selection of magnetic input button **345** initiates the process of defining an input received by a magnetometer of the smart device, such as holding the smart object near a magnet, or the motion of an actuator or switch of the smart object that includes a magnet. Selection of GPS event button **346** initiates the process of defining an input or event based on the current location of the smart object.

[0034] Output action buttons **350** include buttons for selecting a function or other physical output to be performed by the smart device, typically in response to a specific input or event. In the embodiment illustrated in FIG. 3, output event buttons **350** include a display text button **351**, a display image button **352**; an enable light output button **353**, a play sound button **354**, and a produce motion button **355**. GUI **300** further includes two programmatic control buttons for variable features: a color group button **356** for selecting a color of a light output and a timer button **357** for specifying a certain period of time during which an action is performed and/or after which the action is performed.

[0035] Selection of one of output action buttons **350** initiates the process of defining an output or function, for example in response to an input defined by one of input event buttons **340**. Similar to input event buttons **340**, when one of output action buttons **350** is selected, a process is initiated by which an output or function to be performed by the smart device is defined. For example, a series of drop-down menus or user prompt windows may be displayed to guide a designer through the process of defining relevant parameters associated with the function, such as magnitude and/or frequency of vibration, magnitude and/or color of light output, location on the screen of the smart device at which the light output is implemented, etc. In some embodiments, input event buttons **340** can be employed in conjunction with color group button **356** and/or timer button **357** for a more detailed definition of the output action to be performed by the smart object. One such embodiment is illustrated in FIG. 4.

[0036] FIG. 4 is an illustration of GUI **300** displaying a smart object behavior definition process, according to various embodiments of the invention. As shown, resultant programming elements (**401**, **402**, **403**, **404**, **405**, **413**, **414**, and **420**) are displayed in visual programming panel **320** when a designer selects an input and corresponding behaviors as part of the smart object behavior definition process for a smart object.

[0037] In the embodiment illustrated in FIG. 4, a button press input **401** is shown in the visual programming interface when the designer selects touch input button **341** and a play sound output box **402** is shown when the designer drags the play sound button **354** onto visual programming panel **320**. Using, for example, a drop-down menu (not shown), or a user prompt window (not shown), the designer selects a sound from an existing library of WAV or other suitable sounds files (e.g., a siren sound). A first light module **403** and a second light module **404** are shown in the visual programming interface when the designer drags two enable light output buttons **353** onto visual programming panel **320**. In addition, when first light module **403** is displayed, smart object programming application **122** prompts the designer to provide additional output information to further define the light output associated with first light module **403**, and the result of such designer input is displayed as a first color module **413**. For example, the designer may be prompted for information to be input via color group button **356**, including a specific color (e.g., white), brightness, and the like. Similarly, second color module **414** is displayed as the result of additional designer input associated with second light module **404**, and indicates the color selected by the designer for the second light output (e.g., red). Selection of timer button **357** and associated designer input causes a timer module **405** to be displayed. Lastly, the logical connections **420** are displayed in response to designer graphical input. For example, logical connections **420** between button press input **401**, play sound output box **402**, first light module **403**, second light module **404**, timer module **405**, first color module **413**, and second color module **414** are displayed as shown in response to the designer dragging links between the appropriate programming elements. Alternatively or additionally, the designer may cause logical connections to be generated via any other technically feasible graphical connection or input procedure.

[0038] Upon completion of designer inputs via the visual programming interface of GUI **300**, smart object programming application **122** generates appropriate code based on the content associated with button press input **401**, play sound output box **402**, first light module **403**, second light module **404**, timer module **405**, first color module **413**, and second color module **414**, as well as on the logical connections **420** defined therebetween. Smart object programming application **122** then streams a first portion of the generated code to smart object software application **150** in the appropriate smart device (i.e., either smart device **130** or wearable smart device **140**). In addition, smart object programming application **122** stores a second portion of the generated code in computing device **120** for control of the smart object. For example, the second portion of the generated code can be included in smart object control application **123**.

[0039] Once a designer has defined smart device behaviors for a smart object via GUI **300** as set forth above, smart object programming application **122** can then perform a guided design process. Specifically, smart object programming application **122** guides a designer through the process of placing the physical components within an imported 3D model, which can then be fabricated using conventional 3D printing techniques. For example, based on prompts provided by smart object programming application **122**, a designer can indicate locations on an imported 3D model for input mechanisms and/or output locations, when applicable. In some embodiments, an imported 3D model **480** is dis-

played in 3D modelling panel **330** of GUI **300**, as shown in FIG. **4**, and the designer can employ graphical inputs to provide requested information to smart object programming application **122** as part of the guided modelling process. In some embodiments, input or output mechanisms **490** that are generated by smart object programming application **122** are also displayed in 3D modelling panel **330**, such as a capacitive button **491** (to be printed in a conductive material such as polylactide) and a button spring **492** (to be printed in an elastic material such as NinjaFlex).

[0040] In some embodiments, the order of modeling steps is predetermined, using a fixed rule-set. For example, in some embodiments, smart object programming application **122** positions the smart device as an initial or early step in the process, since light outputs and text outputs are generally implemented based on a specific position of the screen of the smart device being embedded. Subsequently, smart object programming application **122** instructs the user to place the location of light outputs when applicable, so that light-guiding structures can be generated within the imported 3D model that guide light from a suitable portion of the screen of the smart device to the selected location of the light output. For example, the 3D model may be modified to include curved paths of a suitable diameter that are formed to house a specific configuration of optic fiber or light pipe. Smart object programming application **122** also instructs the user to place the location of input features when applicable, such as a capacitive button or slider, a magnetic switch or slider, and the like.

[0041] Upon completion of the guided modelling process, smart object programming application **122** generates a 3D model of the smart object that is a modified version of the imported 3D model. The imported 3D model is automatically modified, based on the preceding designer inputs, to accommodate the incorporation of a selected smart device within the smart object. Thus, the 3D model is modified to include a cavity that accommodates the selected smart device. When the smart object is selected to have a behavior that is enabled by an exposed portion of the smart device, such as the screen or camera of the smart device, smart object programming application **122** positions the cavity at or near an appropriate surface of the smart object. For example, when the smart object includes a text-based output or an image-based output, smart object programming application **122** positions the screen of the smart device within the 3D model so that the requisite portion of the smart device is exposed. The smart device can be exposed by the removal of a suitable surface portion of the 3D model or by collocating the requisite portion of the smart device with a suitable surface of the smart object. In some embodiments, positioning of the screen is a designer input that is prompted by smart object programming application **122** during the above-described guided modelling process.

[0042] After the smart device is positioned, smart object programming application **122** automatically splits the 3D model into two pieces, as shown in FIG. **5**. FIG. **5** is a schematic illustration of a 3D model split into two pieces as part of an automated design process, according to various embodiments of the invention. As shown, smart object programming application **122** separates imported 3D model **480** (shown in FIG. **4**) into a top half **510** and a bottom half **520**. In addition, smart object programming application **122** adds alignment pins **501** in one of the two halves and corresponding alignment holes **502** in the other of the two

halves. Smart object programming application **122** further defines top half **510** and bottom half **520** with a cavity **530** that accommodates the smart device to be incorporated into the smart object formed by top half **510** and bottom half **520**. Output features **504** are included in the modified 3D model, as well as any mechanism cavities **503** that are needed to accommodate mechanical input or output features of the smart object. For example, in the embodiment illustrated in FIG. **5**, a mechanism cavity **503** is shown that accommodates conductive button **491** shown in FIG. **4**.

[0043] After cavity **530** is defined and the 3D model is split into top half **510** and bottom half **520**, smart object programming application **122** includes input and output features or mechanisms in the modified 3D model of the smart object as appropriate. These added input and output features or mechanisms enable the smart object to implement the behaviors selected by the designer via outputs generated by the smart device embedded in the smart object. For instance, to enable the location of a light output at a specific location that is not coincident with the screen of the smart device, smart object programming application **122** modifies the imported 3D model to include a channel that is configured to contain an optic fiber is routed from a screen surface of the smart device to the specific location, such as one of output features **504**. Alternatively or additionally, one or more of the added input and output features or mechanisms may enhance an output generated by the smart device. In one such example, to enhance the capability of the smart device to detect sound-based inputs, smart object programming application **122** includes a hollow channel from an exterior surface of the smart object to the microphone of the smart device. Alternatively or additionally, in some embodiments, smart object programming application **122** includes physical features in the smart object that enable other functionalities of the smart object. For example, smart object programming application **122** can include a 3D printed tube that connects the built-in microphone and speakers of the smart device. This 3D tube can act as a passive acoustic transducer to other input methods (e.g., tilt sensors, sliders, etc.), which allows the smart device to sense interactions with and without added electronics.

Design and Generation of Smart Object

[0044] FIGS. **6A** and **6B** set forth a flowchart of method steps for designing and generating a smart object, according to various embodiments of the present invention. Although the method steps are described in conjunction with the systems of FIGS. **1-4**, persons skilled in the art will understand that any system configured to perform the method steps, in any order, is within the scope of the present invention.

[0045] As shown, a method **600** begins at step **601**, where smart object programming application **122** receives a model of a 3D object on which the form factor of a smart object is to be based. For example, a user may cause the model to be transmitted to smart object programming application **122** via GUI **300**.

[0046] In step **602**, smart object programming application **122** receives an input specifying what smart device is to be included in the smart object being generated. For example, a user may indicate one of wearable smart device **140** or smart device **130** via GUI **300**.

[0047] In step **603**, smart object programming application **122** receives an input, for example from GUI **300**, specifying

ing a particular smart object behavior. Smart object behaviors can include, in response to a specified input or event, a text display, an image display, a light display, and/or sound generation, among others. The specified input or inputs can include discrete inputs (those that have an explicit triggering event) and continuous inputs (those that respond to changing, always available values). Discrete inputs can include a button push (directly to the smart device screen or via a mechanism formed from a conductive material), speech (such as word recognition), shaking or tapping of the smart object, orientation of the smart object, and web-based or GPS-based events. Continuous inputs can include sound or light level, orientation (where a continuous value is mapped to a specific output module), and web-based or GPS-based events or values.

[0048] In step 604, smart object programming application 122 generates instructions for the smart device to implement the smart object behavior defined in step 603. Alternatively, smart object programming application 122 generates instructions for all smart object behaviors after all smart object behaviors have been defined and prior to step 713.

[0049] In step 605, smart object programming application 122 determines whether additional parameters are needed to define the currently specified smart object behavior. If yes, method 600 proceeds to step 606; if no, method 600 proceeds to step 611.

[0050] In step 606, smart object programming application 122 displays a prompt or drop-down menu that requests the additional parameter inputs needed to define the currently specified smart object behavior. For example, for a light output in a smart object in which the screen of the embedded smart device is not exposed, a position on the surface of the smart object for the specified light output is requested from the designer by smart object programming application 122.

[0051] In step 607, smart object programming application 122 receives one or more parameter inputs via GUI 300 that specify the smart object behavior. Method 600 then proceeds back to step 604.

[0052] In step 611, smart object programming application 122 displays a prompt for additional smart object behaviors to be programmed into the smart object being generated.

[0053] In step 612, smart object programming application 122 determines whether additional smart object behaviors have been indicated by the designer. If yes, method 600 proceeds back to step 603; if no, method 600 proceeds to step 613.

[0054] In step 613, smart object programming application 122 transmits instructions to the smart device that is to be embedded in the smart object being generated. In some embodiments, smart object programming application 122 also stores a portion of the instructions for use by or incorporation into smart object control application 123. Upon completion of step 613, the designer has defined the behavioral description of the smart device being generated, and smart object programming application 122 has guided the designer through the process of placing physical components of the smart object associated with the behavioral description. Method 600 then proceeds to step 701 in FIG. 7.

[0055] In step 701, smart object programming application 122 determines the physical components to be added to the 3D model received in step 601. The physical components

include one or more input mechanisms and/or one or more output mechanisms, as well as light guides, sound tunnels, and the like.

[0056] In step 702, smart object programming application 122 positions the smart device within the 3D model that is the basis for the morphology of the smart object being generated. As set forth above, the position may be based on designer inputs and/or on whether the screen of the smart device is to be exposed or fully embedded within the smart object.

[0057] In step 703, smart object programming application 122 splits the 3D model into two halves, such as a top half and a bottom half. The division plane is selected to intersect with the position of the smart device determined in step 702. Alignment pins are added to one half and corresponding alignment holes are added to the other half.

[0058] In step 704, smart object programming application 122 selects a physical component from the group of physical components determined in step 701.

[0059] In step 705, smart object programming application 122 modifies the 3D model to include the selected physical component.

[0060] In step 706, smart object programming application 122 determines whether there are any remaining physical components from the group of physical components to be included in the modified 3D model for generating the smart object. If yes, method 600 proceeds back to step 704; if no, method 600 proceeds to step 707.

[0061] In step 707, smart object programming application 122 exports the modified 3D model for fabrication of the smart object being generated. In some embodiments, 3D models for additional components are also exported for fabrication in step 707. For example, 3D models of components generated by smart object programming application 122 that are to be formed from different materials than the first and second halves of the smart object may also be exported for fabrication in step 707.

[0062] In sum, embodiments of the present invention provide techniques for generating a smart object. The smart object incorporates a smart device for interpreting physical inputs to the smart object and generating appropriate physical outputs for the smart object. A user enters parameters for high-level interactive behaviors of the smart object via a visual programming interface. In addition, the user graphically positions physical components of a 3D model of the smart object to enable specified behaviors of the smart object via the visual programming interface. The 3D model and associated physical components can then be fabricated using conventional 3D printing techniques.

[0063] At least one advantage of the disclosed techniques is that a user can generate a functional smart object and specify high-level interactive behaviors of the smart object without designing specialized circuits or control systems, or writing and debugging control logic. An additional advantage is that a smart device can be easily incorporated into a prototype smart object. The behavior of the smart device can then be easily tested or modified by changing behavior parameters via the visual programming interface, rather than by reprogramming software or redesigning circuitry for the smart object. These advantages provide a technological improvement over prior art techniques, in which prototyping and testing an interactive smart device is an involved and multifaceted process that requires extensive knowledge from many technical fields. By contrast, the techniques

disclosed herein provide computer-aided techniques for designing a smart object, defining the behavior of the smart object, and modifying the behavior of the smart object.

[0064] 1. In some embodiments, a method for designing and generating a smart object comprises: receiving a first input indicating a smart object behavior of a smart object that includes a smart device embedded in a three-dimensional (3D) object; in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and transmitting the computer instructions to the smart device.

[0065] 2. The method of clause 1, wherein the computer instructions cause the smart device to generate at least one of a text display, an image display, a screen-based light output, a sound output, and a haptic output.

[0066] 3. The method of clauses 1 or 2, further comprising: receiving a 3D model of the 3D object; defining a cavity within the 3D model that accommodates the smart device; and separating the 3D model of the 3D object into a first half and a second half via a separation surface.

[0067] 4. The method of any of clauses 1-3, further comprising: adding an alignment pin to the first half; adding an alignment hole to the second half, wherein the alignment hole aligns with the alignment pin when the first half and the second half are joined.

[0068] 5. The method of any of clauses 1-4, prior to defining the cavity, receiving a second input indicating what smart device is to be embedded in the 3D object.

[0069] 6. The method of any of clauses 1-5, prior to defining the cavity, receiving a second input indicating a location within the 3D object for the smart device.

[0070] 7. The method of any of clauses 1-6, wherein the cavity is configured to leave at least a portion of one surface of the smart device exposed when the smart device is embedded in the 3D object.

[0071] 8. The method of any of clauses 1-7, further comprising modifying the 3D model to include a mechanism that enables a physical input to be received by the smart device while embedded in the 3D object.

[0072] 9. The method of any of clauses 1-8, further comprising modifying the 3D model to include a mechanism that enables the smart device to implement the smart object behavior while embedded in the 3D object.

[0073] 10. In some embodiments, a non-transitory computer readable medium stores instructions that, when executed by a processor, cause the processor to perform the steps of: receiving a first input indicating a smart object behavior of a smart object that includes a smart device embedded in a three-dimensional (3D) object; in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and transmitting the computer instructions to the smart device.

[0074] 11. The non-transitory computer readable medium of clause 10, wherein the first input is generated and received via a visual programming interface.

[0075] 12. The non-transitory computer readable medium of clauses 10 or 11, wherein the smart object behavior comprises a response to an event that is detected by the smart device.

[0076] 13. The non-transitory computer readable medium of any of clauses 10-12, wherein the smart device detects the event via at least one of a camera, a magnetometer, a global positioning system, a microphone, a touchscreen, a Web interface, or an accelerometer.

[0077] 14. The non-transitory computer readable medium of any of clauses 10-13, wherein the computer instructions cause the smart device to generate at least one of a text display, an image display, a screen-based light output, a sound output, and a haptic output.

[0078] 15. The non-transitory computer readable medium of any of clauses 10-14, further comprising: receiving a 3D model of the 3D object; defining a cavity within the 3D model that accommodates the smart device; and separating the 3D model of the 3D object into a first half and a second half via a separation surface.

[0079] 16. The non-transitory computer readable medium of any of clauses 10-15, further comprising: adding an alignment pin to the first half; adding an alignment hole to the second half, wherein the alignment hole aligns with the alignment pin when the first half and the second half are joined.

[0080] 17. The non-transitory computer readable medium of any of clauses 10-16, prior to defining the cavity, receiving a second input indicating what smart device is to be embedded in the 3D object.

[0081] 18. A system, comprising: a smart object that includes: a three-dimensional (3D) object configured to accommodate a smart device with a cavity; and the smart device; and a computing device that includes: a memory that stores instructions, and a processor that is coupled to the memory and, when executing the instructions, is configured to: receive a first input indicating a smart object behavior of the smart object; in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and transmitting the computer instructions to the smart device.

[0082] 19. The system of clause 18, wherein the smart device executes the computer instructions while disposed in the cavity.

[0083] 20. The system of clauses 18 or 19, wherein the 3D object includes a physical feature that enables the smart device to implement the smart object behavior.

[0084] Any and all combinations of any of the claim elements recited in any of the claims and/or any elements described in this application, in any fashion, fall within the contemplated scope of the present invention and protection.

[0085] The descriptions of the various embodiments have been presented for purposes of illustration, but are not intended to be exhaustive or limited to the embodiments disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the described embodiments.

[0086] Aspects of the present embodiments may be embodied as a system, method, or computer program product. Accordingly, aspects of the present invention may take the form of an entirely hardware embodiment, an entirely software embodiment (including firmware, resident software, micro-code, etc.) or an embodiment combining software and hardware aspects that may all generally be referred to herein as a "module" or "system." Furthermore, aspects of the present invention may take the form of a computer

program product embodied in one or more computer readable medium(s) having computer readable program code embodied thereon.

[0087] Any combination of one or more computer readable medium(s) may be utilized. The computer readable medium may be a computer readable signal medium or a computer readable storage medium. A computer readable storage medium may be, for example, but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus, or device, or any suitable combination of the foregoing. More specific examples (a non-exhaustive list) of the computer readable storage medium would include the following: an electrical connection having one or more wires, a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), an optical fiber, a portable compact disc read-only memory (CD-ROM), an optical storage device, a magnetic storage device, or any suitable combination of the foregoing. In the context of this document, a computer readable storage medium may be any tangible medium that can contain or store a program for use by or in connection with an instruction execution system, apparatus, or device.

[0088] Aspects of the present invention are described above with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems) and computer program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions. These computer program instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, enable the implementation of the functions/acts specified in the flowchart and/or block diagram block or blocks. Such processors may be, without limitation, general purpose processors, special-purpose processors, application-specific processors, or field-programmable processors.

[0089] The invention has been described above with reference to specific embodiments. Persons of ordinary skill in the art, however, will understand that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. For example, and without limitation, although many of the descriptions herein refer to specific types of application data, content servers, and client devices, persons skilled in the art will appreciate that the systems and techniques described herein are applicable to other types of application data, content servers, and client devices. The foregoing description and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

[0090] The flowchart and block diagrams in the figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods and computer program products according to various embodiments of the present invention. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of code, which comprises one or more executable instructions for implementing the specified logical function

(s). It should also be noted that, in some alternative implementations, the functions noted in the block may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts, or combinations of special purpose hardware and computer instructions.

What is claimed is:

1. A method for designing and generating a smart object, the method comprising:

receiving a first input indicating a smart object behavior of a smart object that includes a smart device embedded in a three-dimensional (3D) object;

in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and transmitting the computer instructions to the smart device.

2. The method of claim 1, wherein the computer instructions cause the smart device to generate at least one of a text display, an image display, a screen-based light output, a sound output, and a haptic output.

3. The method of claim 1, further comprising:

receiving a 3D model of the 3D object; defining a cavity within the 3D model that accommodates the smart device; and

separating the 3D model of the 3D object into a first half and a second half via a separation surface.

4. The method of claim 3, further comprising:

adding an alignment pin to the first half; adding an alignment hole to the second half, wherein the alignment hole aligns with the alignment pin when the first half and the second half are joined.

5. The method of claim 3, prior to defining the cavity, receiving a second input indicating what smart device is to be embedded in the 3D object.

6. The method of claim 3, prior to defining the cavity, receiving a second input indicating a location within the 3D object for the smart device.

7. The method of claim 3, wherein the cavity is configured to leave at least a portion of one surface of the smart device exposed when the smart device is embedded in the 3D object.

8. The method of claim 1, further comprising modifying the 3D model to include a mechanism that enables a physical input to be received by the smart device while embedded in the 3D object.

9. The method of claim 1, further comprising modifying the 3D model to include a mechanism that enables the smart device to implement the smart object behavior while embedded in the 3D object.

10. A non-transitory computer readable medium storing instructions that, when executed by a processor, cause the processor to perform the steps of:

receiving a first input indicating a smart object behavior of a smart object that includes a smart device embedded in a three-dimensional (3D) object;

in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and transmitting the computer instructions to the smart device.

11. The non-transitory computer readable medium of claim **10**, wherein the first input is generated and received via a visual programming interface.

12. The non-transitory computer readable medium of claim **10**, wherein the smart object behavior comprises a response to an event that is detected by the smart device.

13. The non-transitory computer readable medium of claim **12**, wherein the smart device detects the event via at least one of a camera, a magnetometer, a global positioning system, a microphone, a touchscreen, a Web interface, or an accelerometer.

14. The non-transitory computer readable medium of claim **10**, wherein the computer instructions cause the smart device to generate at least one of a text display, an image display, a screen-based light output, a sound output, and a haptic output.

15. The non-transitory computer readable medium of claim **10**, further comprising:

receiving a 3D model of the 3D object;

defining a cavity within the 3D model that accommodates the smart device; and

separating the 3D model of the 3D object into a first half and a second half via a separation surface.

16. The non-transitory computer readable medium of claim **15**, further comprising:

adding an alignment pin to the first half;

adding an alignment hole to the second half, wherein the alignment hole aligns with the alignment pin when the first half and the second half are joined.

17. The non-transitory computer readable medium of claim **15**, prior to defining the cavity, receiving a second input indicating what smart device is to be embedded in the 3D object.

18. A system, comprising:

a smart object that includes:

a three-dimensional (3D) object configured to accommodate a smart device with a cavity; and
the smart device; and

a computing device that includes:

a memory that stores instructions, and
a processor that is coupled to the memory and, when executing the instructions, is configured to:
receive a first input indicating a smart object behavior of the smart object;

in response to the input, generating computer instructions for the smart device, wherein the computer instructions, when executed by the smart device, cause the smart object to implement the smart object behavior; and
transmitting the computer instructions to the smart device.

19. The system of claim **18**, wherein the smart device executes the computer instructions while disposed in the cavity.

20. The system of claim **18**, wherein the 3D object includes a physical feature that enables the smart device to implement the smart object behavior.

* * * * *